



## Need it Ultra Low?

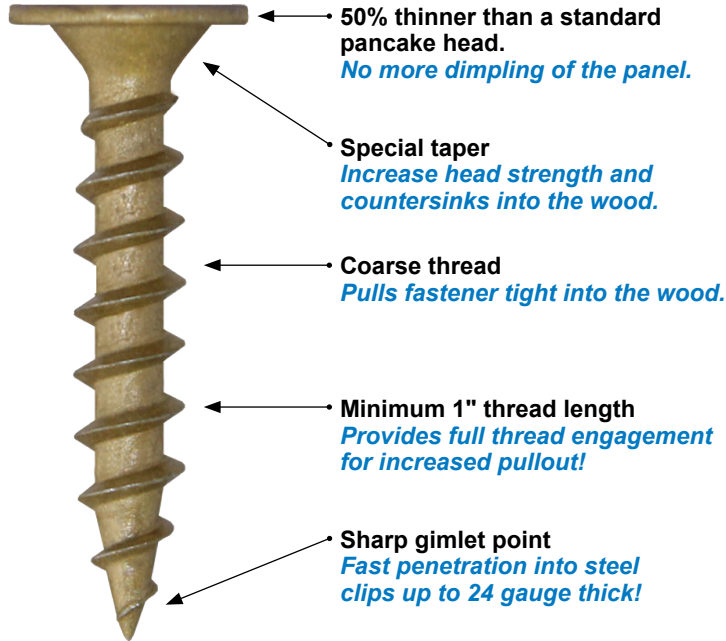


Available in lengths up to 2-1/8"!

## Trust the original Ultra Low Profile fastener!

The CONCEALOR® ULP screws are engineered to attach standing seam roof clips to wood. They are the preferred screw for attaching clip-less metal roof panels, are easy to install, and provide optimal strength. ULP's are supplied with TRI-SEAL® 1,000-hours salt spray coating which can be used in treated and fire treated lumber.

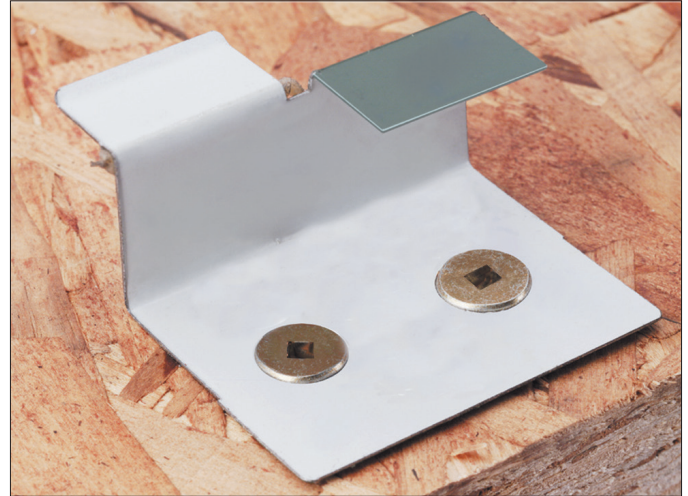

Bagged 250 pcs. per bag for your convenience!

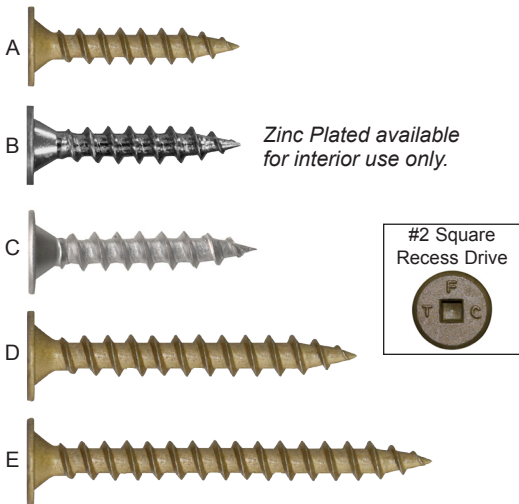

### Sizes

	Description	Drilling Thickness	Part Number	Box Quantity	WT Per Box
A	#10-9 X 1-1/8" ULP (CS) Long-life TRI-SEAL™ coated	<= 24 ga.	10112SPCUGCSTS	5,000	31.0 lbs
B	#10-9 X 1-1/8" ULP (CS) Zinc Plated Interior Use Only	<= 24 ga.	10112SPCUGCSZP	5,000	31.0 lbs
C	#10-9 X 1-1/8" ULP (410 SS) Passivated	<= 24 ga.	101125SPCUGS4	5,000	32.0 lbs.
D	#10-9 X 1-5/8" ULP (CS) Long-life TRI-SEAL™ coated	<= 24 ga.	1062SPCUGCSTS	3,000	34.0 lbs.
E	#10-9 X 2-1/8" ULP(CS) Long-life TRI-SEAL™ coated	<= 24 ga.	10212SPCUGCSTS	1,500	17.0 lbs.

CS = Carbon Steel - C1018 / C1022  
410 SS = 410 Stainless Steel

### TECHNICAL INFORMATION

Description: #10-9 Gimlet Point self-tapping screw  
Head Style: Ultra low pancake head with taper.  
Drive System: #2 square recess  
Head Thickness: .040"  
Material: C1018 carbon steel  
410 Stainless steel  
(Copper Roofing Compatible)  
Heat Treat: Case hardened to ANSI/ASME B18.6.4 specification  
Finish  
Carbon Steel: TRI-SEAL™ long-life coating (1,000hrs. salt spray)  
Stainless Steel: Passivated (48hrs. salt spray)

#### Thread Detail

Major Diameter: .195"  
Minor Diameter: .125"  
Stress Area: .01267 in²

### Pullout - Average Ultimate in Pounds

Fastener Dia. & Point	Wood Type						
	1/2" Plywood	5/8" Plywood	3/4" Plywood	7/16" OSB	19/32" OSB	23/32" OSB	2 x 4 SYP
#10-9 GP	383	395	574	136	356	514	813

Farabaugh Engineering Test: Project No. T279-10

Rev 040711

### Fastener Strength

Torsional	60 lb-in
Tensile	1,520 lbs. min.
Shear	1,150 lbs. min.

**Installation:** Do not use impact drivers!  
Use 2,500 RPM max variable speed screw drivers  
with torque control or depth sensing nosepiece.