




1/4-14 DP3 - DRILL AND TAP UP TO 1/4" THICK STEEL

#14 DP3 CONCEALOR® pancake head screws are designed for heavy gauge applications and can drill and tap up to 1/4" steel. The 1/4-14 thread produces greater strength and resists bending compared to smaller diameter screws.

These screws are coated with TRI-SEAL™ long-life coating that exceeds ASTM B633 specifications providing 1,000-hours salt spray performance, and FM4470 per ASTM G87 Sulfur Dioxide Test.


SPECIAL HEAD DESIGN



- 5/8" diameter head increases pullover strength and minimizes dimpling.
- #3 square recess drive provides stability during installation.

	Description	Attachment Thickness	Part Number	Carton Quantity	Wt Per M Pcs
A	1/4-14 X 1" DP3 .0003" Zinc and Yellow	1/4" Max	14100SPC3CS	2,500 pcs	27#
B	1/4-14 x 2" DP3	1.000" Max	14200SPC3CSTS	1,000 pcs	23#
C	1/4-14 x 3" DP3	1.375" to 2.125"	14300SPC3CSTS	1,000 pcs	33#
D	1/4-14 x 4" DP3	1.625" to 3.125"	14400SPC3CSTS	500 pcs	21#
E	1/4-14 x 5" DP3	2.750" to 4.125"	14500SPC3CSTS	500 pcs	25#
F	1/4-14 x 6" DP3	3.750" to 5.125"	14600SPC3CSTS	500 pcs	30#
G	1/4-14 x 7" DP3	4.750" to 6.125"	14700SPC3CSTS	500 pcs	36#
H	1/4-14 x 8" DP3	5.750" to 7.125"	14800SPC3CSTS	250 pcs	21#

A Army Corps of Engineers
.0003" Zinc & Yellow

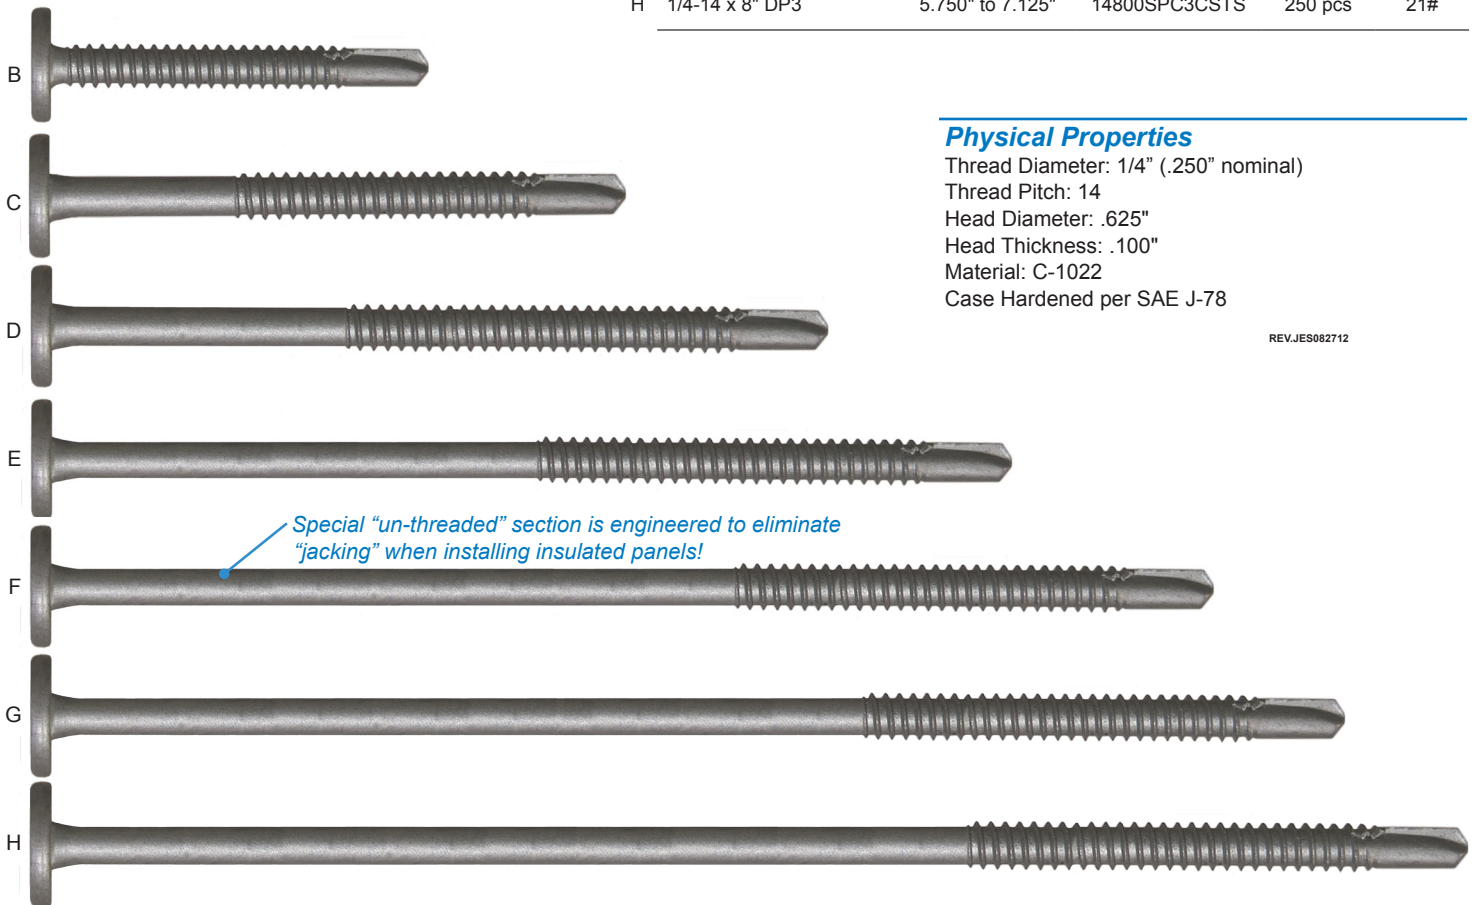

Special "un-threaded" section is engineered to eliminate "jacking" when installing insulated panels!

Physical Properties


Thread Diameter: 1/4" (.250" nominal)
 Thread Pitch: 14
 Head Diameter: .625"
 Head Thickness: .100"
 Material: C-1022
 Case Hardened per SAE J-78

REV.JES082712

SPECIAL APPLICATIONS

Use to attach a variety of material to steel up to 1/4" thick!

ARCHITECTURAL INSULATED PANELS



STRUCTURAL INSULATED PANELS



NAIL BASE



METAL ROOF CLIPS



TOOLING: Install using a 2,000 RPM screw-gun with torque control. (DeWalt DW267)
Do not use impact tools.